### Ventilation for Acceptable Indoor Air Quality Part 5 – Building Pressurization for Acceptable IAQ

David S. Dougan, President

Loris, South Carolina





### ASHRAE Standard 62.1-2019

#### Section 5 - Systems and Equipment

**5.11 Building Exfiltration.** Ventilation systems for a building equipped with or served by mechanical cooling equipment shall be designed such that the total building outdoor air intake equals or exceeds the total building exhaust under all load and dynamic reset conditions.

#### **Exceptions:**

2. When outdoor air dry-bulb temperature is below the indoor space dew-point design temperature.

**Informative Note:** Although individual zones within a building may be neutral or negative with respect to outdoors or to other zones, r et positive mechanical intake airflow for the building as a whole reduces infiltration of untreated outdoor air.



# Negative Pressure and IAQ






## Cooling






## High Dew Point Regions Percentage of year that the dew point exceeds 65 F

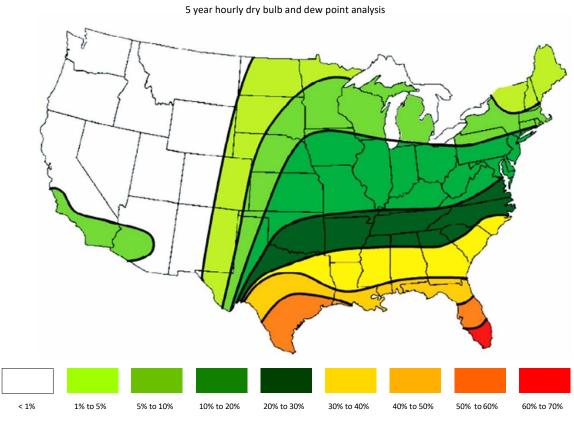

Data provided to EBTRON courtesy of the Forecast Institute, Inc.




#### Annual Gallons of Water Transported Across the Building Envelope for every 1,000 CFM of Negative Airflow First 30 of top 50 US Cities by Population (2000 Census)

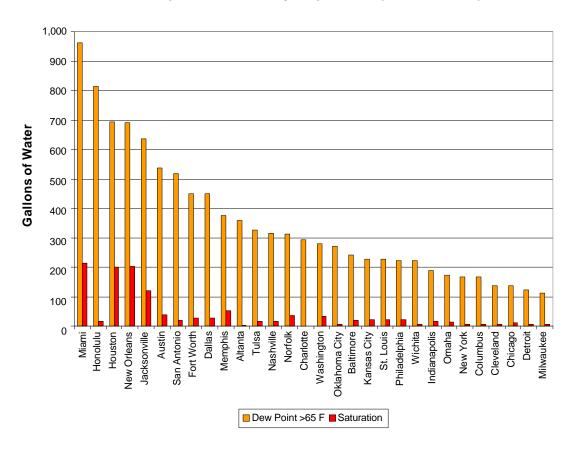



# Avg. Daily Gallons of Water Transported Across the Building Envelope for every 1,000 CFM of Negative Airflow (when outdoor conditions specified exist)

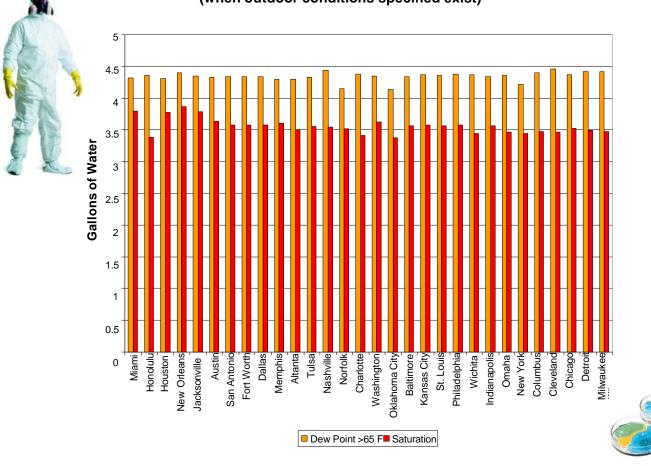



## Free Cooling (i.e. economizing)







## Heating










# Building Pressure






## Understand the Pressurization Flow

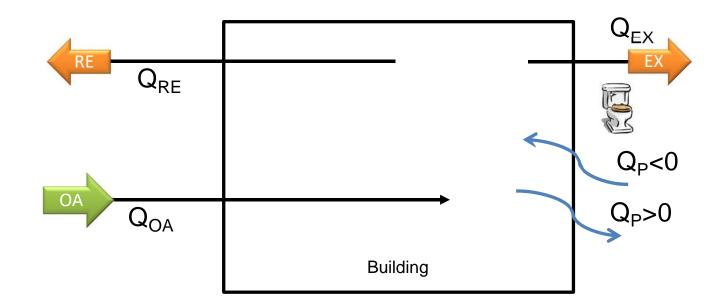



## Understand the Pressurization Flow

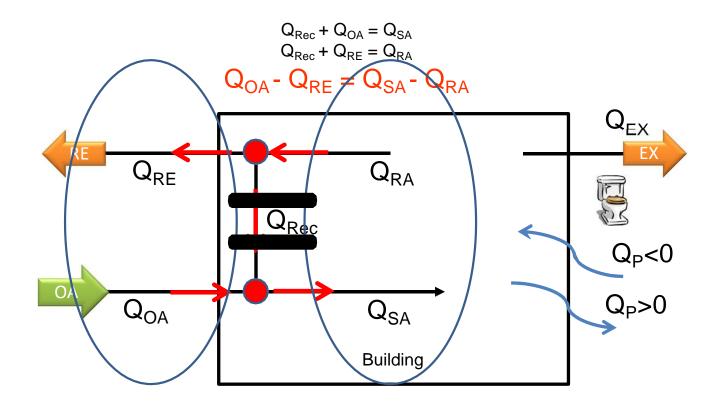



## Thank You!

Questions? More information?

Contact Technical Air Systems, Inc. NY/NJ EBTRON Representative <a href="mailto:pscheele@technicalair.com">pscheele@technicalair.com</a>

NY: 212-946-4935

NJ:973-285-0333

